

EPOXY, URETHANE & POLYASPARTIC SEALERS

JUNE 2020

Permacolour's wide range of sealers now includes Metallic Epoxy, Water Based Epoxy, Water Based Urethane, Polyaspartics and 100% solids Epoxy. These sealers, each with their own unique properties, are ideal for the sealing of internal surfaces such as polished concrete, coloured concrete, concrete bench tops surfaces and as a final sealer over Permacolour's Micro Topping, Chemical Stain and Overlay. Some suitable areas for application include: showrooms, labs, garages, restrooms, food prep & kitchen areas, kennels, & veterinary facilities and many more.

MANUFACTURERS AND SUPPLIERS OF

BLACK AND COLOURED IRON OXIDES

- POWDER
- GRANULAR
- LIQUID COLOUR

FLOOR COATINGS

- OVERLAY
- CEMCOTE
- COLOUR HARDENER
- CHEMICAL STAIN
- MICRO TOPPING

WALL COATINGS

- CEMPAINT
- MICRO COLOUR
- FIBRECOTE
- DECOCRETE

CONCRETE ADMIXTURES

- ACTIVATOR

SEALERS

- SOLVENT
- EPOXY
- URETHANE
- WATER BASED
- LOW ODOUR
- MATTING AGENTS
- TINTED SEALERS
- DENSIFIERS
- SILICONE BASED

STAMPED CONCRETE MATS

- SEAMLESS
- TIMBER
- SLEEPER
- STONE & BLOCK PATTERNS
- STENCILS

ADDITIVES

- WATERPROOFING
- PLASTICIZING AGENTS
- FIBRES
- ACCELERATORS
- HARDENERS
- EFFLORESCENCE CONTROL AGENTS

ANTISLIP ADDITIVES

- GLASS GRIT
- SLIP REDUCER

CONCRETE TOOLS

- TROWELS
- SCREEDS
- FLOATS
- BROOMS
- ROLLERS
- CONFORM BOXING
- SAFETY NETS
- ELECTRIC & PUMP SPRAYERS
- GRINDING AND CUTTING DISCS

EQUIPMENT HIRE

- GRINDER
- VACUUM

SAFETY GEAR

- HI VIZ VESTS AND JACKETS
- SAFETY BOOTS
- GLASSES

HEAD OFFICE 42a Egmont Road, PO Box 7022, New Plymouth,
06 755 3320, info@permacolour.co.nz
FREEPHONE 0508 444 555

AUCKLAND WAREHOUSE Unit 4, 16 Zelanian Drive, East Tamaki, Auckland,
09 272 8444, auckland@permacolour.co.nz
FREEPHONE 0508 666 777

CHRISTCHURCH OFFICE 23 Watts Road, Sockburn,
PO Box 39148, Harewood, Christchurch
03 358 9669, christchurch@permacolour.co.nz

*New Zealand Decorative Concrete Supplies
is a private company, 100% New Zealand owned and operated, providing the highest
quality products and service in the decorative concrete industry!*



METALLIC EPOXY FLOORING

Permacolour Metallic Epoxy is a three component, high performance modified cycloaliphatic epoxy concrete floor coating system. Its epoxy chemistry provides excellent bonding characteristics. Typically applied in a single coat at 500 Microns thick (7m2/gal). This dynamic blend does not require activator to be sprayed on the surface to obtain a unique and highly decorative look.



WATERBASED EPOXY

Permacolour Waterbased Epoxy is a premium quality 2-component water base epoxy concrete sealer/primer that provides epoxy toughness, chemical resistance and durability with the convenience of a water base VOC free system.

TYPICAL AREAS OF USE

- Porous & untreated concrete surfaces, must be free of any other sealers/waxes
- Clean rooms
- Hospitals
- Grocery stores
- Walkways
- Garage floors
- Parking structures
- Aircraft hangers

- Automotive repair facilities

ADVANTAGES

- Easy water clean-up
- Long pot life
- Excellent coverage-hide
- Fast drying (30min to 2hours)
- Unsurpassed Adhesion
- VOC Free

SPECIFYING RECOMMENDATIONS

For information please refer to Permacolour's specifiers guide.



The information herein is general information to assist our customers in determining whether our products are suitable for their specific applications. Our products are intended for sale to commercial and Industrial customers. We require that customers should inspect and test our products before use to satisfy themselves as to the content and sustainability for the applications they intend to use our products for. Nothing herein shall constitute any warranty expressed or implied, including any warranty of merchantability or fitness for a particular purpose, nor is replacement of our materials and in no event shall we be liable for incidental or consequential damages.

100% EPOXY

Permacolour 100% Epoxy is a two component, high performance modified cycloaliphatic epoxy concrete floor coating system. Its epoxy chemistry provides excellent bonding characteristics. Paint Chips or Colour Quartz can be broadcast into Permacolour Epoxy to create a custom look. Its design features provide for the highest industrial and commercial demands.

TYPICAL AREAS OF USE

- Food manufacturing & preparation
- Pharmaceutical manufacturing & dispensaries
- Clean rooms
- Commercial kitchens
- Laboratories
- Garage floors
- Rest rooms
- Manufacturing facilities

- Automotive showrooms
- Schools

ADVANTAGES

- Essentially Odourless
- Self-priming over properly prepared substrate
- VOC Compliant
- High Colour Stability
- High gloss
- Withstands medium traffic as thin as 300 microns
- Chemically resistant
- No amine blush

SPECIFYING RECOMMENDATIONS

For information please refer to Permacolour's specifiers guide .



The information herein is general information to assist our customers in determining whether our products are suitable for their specific applications. Our products are intended for sale to commercial and Industrial customers. We require that customers should inspect and test our products before use to satisfy themselves as to the content and sustainability for the applications they intend to use our products for. Nothing herein shall constitute any warranty expressed or implied, including any warranty of merchantability or fitness for a particular purpose, nor is replacement of our materials and in no event shall we be liable for incidental or consequential damages.

METALLIC EPOXY FLOORING

Permacolour Metallic Epoxy is a three component, high performance modified cycloaliphatic epoxy concrete floor coating system. Its epoxy chemistry provides excellent bonding characteristics. Typically applied in a single coat at 500 Microns thick (7m2/gal). This dynamic blend does not require activator to be sprayed on the surface to obtain a unique and highly decorative look.

TYPICAL AREAS OF USE

The uniqueness and universality of Permacolour Epoxy's chemistry facilitates the applications where USDA Food & Beverage and other regulatory requirements must be obtained. Areas of use include:

- Garage floors
- Showrooms
- Hotel Lobbies & Entryways
- Exhibition halls
- Restaurants

- Retail/Commercial Venues.


ADVANTAGES

- Essentially odourless
- Create dynamic and exotic looks ZERO VOC
- High gloss & colour stability Low Viscosity
- Chemically Resistant No amine blush
- Modified to be highly ambering resistance

SPECIFYING RECOMMENDATIONS

For information please refer to Permacolour's specifiers guide.

SAMPLE COLOUR CARD

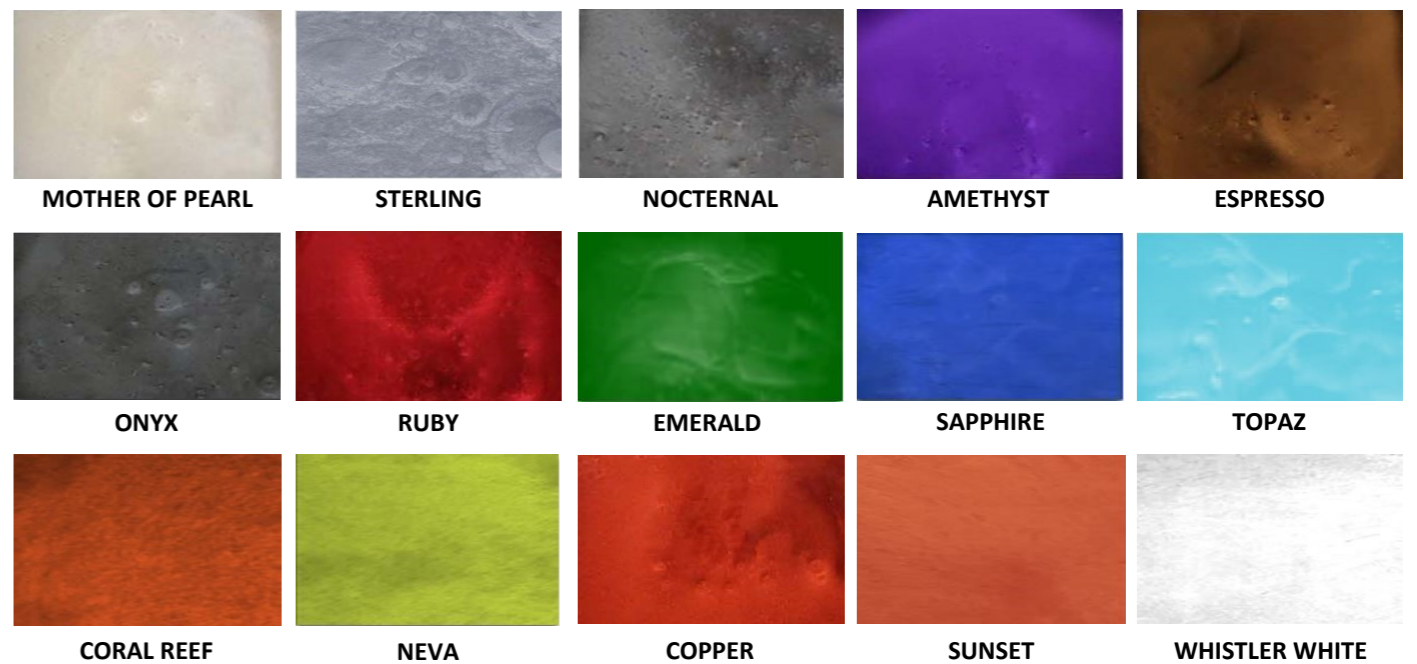

The information herein is general information to assist our customers in determining whether our products are suitable for their specific applications. Our products are intended for sale to commercial and Industrial customers. We require that customers should inspect and test our products before use to satisfy themselves as to the content and sustainability for the applications they intend to use our products for. Nothing herein shall constitute any warranty expressed or implied, including any warranty of merchantability or fitness for a particular purpose, nor is replacement of our materials and in no event shall we be liable for incidental or consequential damages.

POLYASPARTICS

Permacolour Polyaspartics is the next generation in two component, fast drying, Aliphatic Polyurea. While other Polyaspartics can only be applied between 200 and 260 microns, Permacolour Polyaspartic can be applied in a single coat up to 760 microns. It features good abrasion and chemical resistance, and a cure time of four to six hours. It can be installed in extremely high or low temperatures. It is the ideal product when low odour, fast turnaround and a non-yellowing system is required.

- Locker rooms
- Ramps
- Health Care facilities
- Loading docks
- Car wash facilities

ADVANTAGES

- High Gloss & Build
- 4x more abrasion resistant than epoxy
- Non-yellowing
- Chemically resistant
- VOC Free
- Easy mixing ratio (1:1)
- Solvent FREE
- Cures at temperatures near Freezing
- Flexible

SPECIFYING RECOMMENDATIONS

For information please refer to Permacolour's specifiers guide .



The information herein is general information to assist our customers in determining whether our products are suitable for their specific applications. Our products are intended for sale to commercial and Industrial customers. We require that customers should inspect and test our products before use to satisfy themselves as to the content and sustainability for the applications they intend to use our products for. Nothing herein shall constitute any warranty expressed or implied, including any warranty of merchantability or fitness for a particular purpose, nor is replacement of our materials and in no event shall we be liable for incidental or consequential damages.

WATERBASED URETHANE

Permacolour Waterbased Urethane is a premium high solids 2-component water base urethane providing the equal superior performance to Polyaspartic without any odour, health or environmental issues. It gives a hard and durable coating that features good gloss, superior abrasion resistance and UV resistance. Permacolour WBU has been formulated to offer a high performance finish coat for seamless flooring, coating and architectural concrete applications where odour and health concerns are an issue.

- Parking structures
- Aircraft hangers
- Automotive repair facilities

ADVANTAGES

- Unsurpassed adhesion
- Easy clean-up
- Long pot life(3hours)
- Excellent coverage-hide

SPECIFYING RECOMMENDATIONS

For information please refer to Permacolour's specifiers guide.

TYPICAL AREAS OF USE

- Clean rooms
- Hospitals
- Grocery stores
- Walkways
- Garage floors



The information herein is general information to assist our customers in determining whether our products are suitable for their specific applications. Our products are intended for sale to commercial and Industrial customers. We require that customers should inspect and test our products before use to satisfy themselves as to the content and sustainability for the applications they intend to use our products for. Nothing herein shall constitute any warranty expressed or implied, including any warranty of merchantability or fitness for a particular purpose, nor is replacement of our materials and in no event shall we be liable for incidental or consequential damages.